


**SFP-10G-LR-NT**  
Cisco SFP+ 10GBASE-LR Ethernet Module  
1310nm, 10km, SMF, LC, RoHS6!



---

**SFP-10G-LR-NT**  
Cisco SFP+ 10GBASE-LR Ethernet Module  
1310nm, 10km, SMF, LC, RoHS6!

***Features***

10Gb/s serial optical interface compliant to 802.3ae 10GBASE-LR

Electrical interface compliant to SFF-8431 specifications for enhanced 8.5 and 10 Gigabit small form factor pluggable module “SFP+”

1310nm DFB transmitter, PIN photo-detector

2-wire interface for management specifications compliant with SFF 8472 digital diagnostic monitoring interface for optical transceivers

Operating case temperature: 0 to 70°C

All-metal housing for superior EMI performance

Low power consumption

Advanced firmware allow customer system encryption information to be stored in transceiver

Cost effective SFP+ solution, enables higher port densities and greater bandwidth

***Applications***

High-speed storage area networks  
Computer cluster cross-connect  
Custom high-speed data pipes  
10GE Storage, 8G Fiber Channel

**SFP-10G-LR-NT**  
Cisco SFP+ 10GBASE-LR Ethernet Module  
1310nm, 10km, SMF, LC, RoHS6!



---


## Product Description

This 1310 nm DFB 10Gigabit SFP+ transceiver is designed to transmit and receive optical data over single mode optical fiber for link length 10km.

The SFP+ LR module electrical interface is compliant to SFI electrical specifications. The transmitter input and receiver output impedance is 100 Ohms differential. Data lines are internally AC coupled. The module differential termination and reduce differential to common mode conversion for quality signal termination and low EMI. SFI typically operates over 200 mm of improved FR4 material or up to about 150mm of standard FR4 with connector.

The transmitter converts 10Gbit/s serial PECL or CML electrical data into serial optical data compliant with the 10GBASE-LR standard. An open collector compatible Transmit Disable (Tx\_Dis) is provided. A logic "1," or connection on this pin will disable the laser from transmitting. A logic "0" on this pin provides normal operation. The transmitter has an internal automatic power control loop (APC) to ensure constant optical power output across supply voltage and temperature variations. An open collector compatible Transmit Fault (TFault) is provided. TX\_Fault is a module output contact that when high, indicates that the module transmitter has detected a fault condition related to laser operation or safety. The TX\_Fault output contact is an open drain/collector and shall be pulled up to Vcc\_Host in the host with a resistor in the range 4.7-10 kΩ. TX\_Disable is a module input contact. When TX\_Disable is asserted high or left open, the SFP+ module transmitter output shall be turned off. This contact shall be pulled up to VccT with a 4.7 kΩ to 10 kΩ resistor


The receiver converts 10Gbit/s serial optical data into serial PECL/CML electrical data. An open collector compatible Loss of Signal is provided. Rx\_LOS when high indicates an optical signal level below that specified in the relevant standard. The Rx\_LOS contact is an open drain/collector output and shall be pulled up to Vcc\_Host in the host with a resistor in the range 4.7-10 kΩ, or with an active termination. Power supply filtering is recommended for both the transmitter and receiver. The Rx\_LOS signal is intended as a preliminary indication to the system in which the SFP+ is installed that the received signal strength is below the specified range. Such an indication typically points to non-installed cables, broken cables, or a disabled, failing or a powered off transmitter at the far end of the cable.




**SFP-10G-LR-NT**  
 Cisco SFP+ 10GBASE-LR Ethernet Module  
 1310nm, 10km, SMF, LC, RoHS6!

**3. PIN DEFINITION**

The SFP+ modules are hot-pluggable. Hot-pluggable refers to plugging in or unplugging a module while the board is powered. The SFP+ host connector is a 0.8 mm pitch 20 position right angle improved connector specified by SFF-8083, or stacked connector with equivalent with equivalent electrical performance. Host PCB contact assignment is shown in Figure 2 and contact definitions are given in Table 2. SFP+ module contacts mates with the host in the order of ground, power, followed by signal as illustrated by Figure 3 and the contact sequence order listed in Table 2.

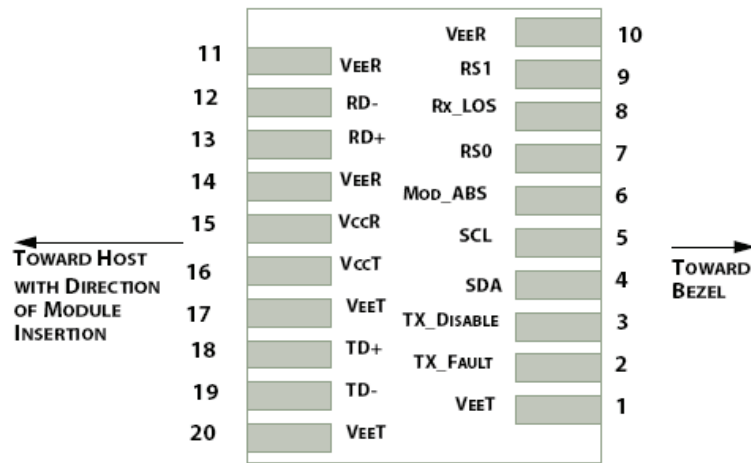

**Figure 2: Module Interface to Host**

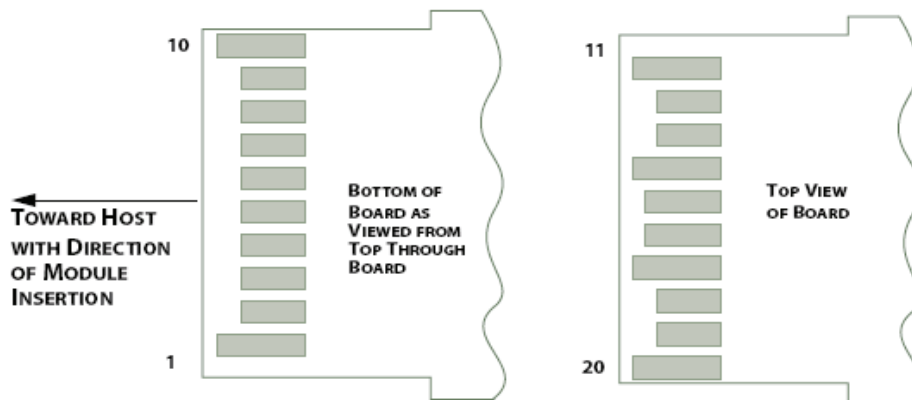

## SFP-10G-LR-NT

Cisco SFP+ 10GBASE-LR Ethernet Module  
1310nm, 10km, SMF, LC, RoHS6!




**Figure 3: Module Contact Assignment**

| PIN | Logic     | Symbol   | Name / Description                                      | Note |
|-----|-----------|----------|---|------|
| 1   |           | VeeT     | Module Transmitter Ground                               | 1    |
| 2   | LVTTL-O   | TX_Fault | Module Transmitter Fault                                |      |
| 3   | LVTTL-I   | TX_Dis   | Transmitter Disable; Turns off transmitter laser output |      |
| 4   | LVTTL-I/O | SDA      | 2-Wire Serial Interface Data Line                       | 2    |
| 5   | LVTTL-I   | SCL      | 2-Wire Serial Interface Clock                           | 2    |
| 6   |           | MOD_DEF0 | Module Definition, Grounded in the module               |      |
| 7   | LVTTL-I   | RS0      | Receiver Rate Select                                    |      |
| 8   | LVTTL-O   | RX_LOS   | Receiver Loss of Signal Indication Active LOW           |      |
| 9   | LVTTL-I   | RS1      | Transmitter Rate Select (not used)                      |      |
| 10  |           | VeeR     | Module Receiver Ground                                  | 1    |
| 11  |           | VeeR     | Module Receiver Ground                                  | 1    |
| 12  | CML-O     | RD-      | Receiver Inverted Data Output                           |      |
| 13  | CML-O     | RD+      | Receiver Data Output (not used)                         |      |
| 14  |           | VeeR     | Module Receiver Ground                                  | 1    |
| 15  |           | VccR     | Module Receiver 3.3 V Supply                            |      |
| 16  |           | VccT     | Module Receiver 3.3 V Supply                            |      |
| 17  |           | VeeT     | Module Transmitter Ground                               | 1    |
| 18  | CML-I     | TD+      | Receiver Non-Inverted Data Output                       |      |
| 19  | CML-I     | TD-      | Transmitter Inverted Data Input                         |      |
| 20  |           | VeeT     | Module Transmitter Ground                               | 1    |


**Note:**

1. Module ground pins GND are isolated from the module case.
2. Shall be pulled up with 4.7K-10Kohms to a voltage between 3.15V and 3.45V on the host board.

**Table 1: SFP+ Module PIN Definition**



#### 4. TRANSCEIVER BLOCK DIAGRAM

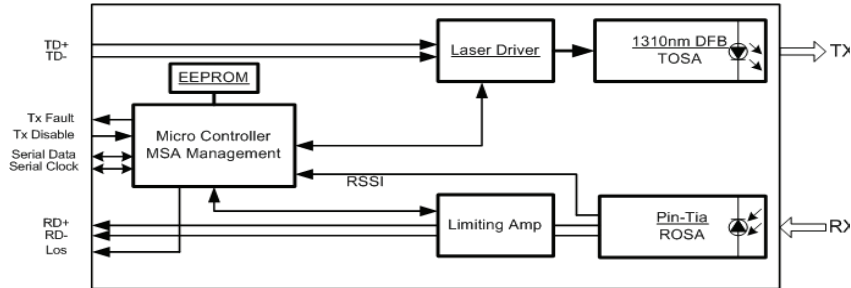

#### 5. ABSOLUTE MAXIMUM RATING

These values represent the damage threshold of the module. Stress in excess of any of the individual Absolute Maximum Ratings can cause immediate catastrophic damage to the module even if all other parameters are within recommended operating range.

| Parameters                 | Symbol           | Min. | Max. | Unit |
|----------------------------|------------------|------|------|------|
| Power Supply Voltage       | V <sub>CC</sub>  | 0    | 3.6  | V    |
| Storage Temperature        | T <sub>c</sub>   | -40  | 85   | °C   |
| Operating Case Temperature | T <sub>c</sub>   | 0    | 70   | °C   |
| Relative Humidity          | RH               | 5    | 95   | %    |
| RX Input Average Power     | P <sub>max</sub> | -    | 0    | dBm  |

**Table 2: Absolute Maximum Rating**

#### 6. RECOMMENDED OPERATING ENVIRONMENT

Recommended Operating Environment specifies parameters for which the electrical and optical characteristics hold unless otherwise noted.

| Parameters                 | Symbol          | Min.  | Typical | Max   | Unit |
|----------------------------|-----------------|-------|---------|-------|------|
| Power Supply Voltage       | V <sub>CC</sub> | 3.135 | 3.3     | 3.465 | V    |
| Operating Case Temperature | T <sub>C</sub>  | 0     | 25      | 70    | °C   |


**Table 3: Recommended Operating Environment**



## 7. OPTICAL CHARACTERISTICS

The following characteristics are defined over the Recommended Operating Environment unless otherwise specified.

| Parameters  | Values     | Unit  |
|---|------------|-------|
| Operating Reach                                     | 2 - 10K    | m     |
| <b>Transmitter</b>                                  |            |       |
| Center wavelength (range)                           | 1260 -1355 | nm    |
| Side Mode Suppression Ratio (min)                   | 30         | dB    |
| Launched power                                      |            |       |
| – maximum (Average)                                 | 0.5        | dBm   |
| – minimum (Average)                                 | -8.2       | dBm   |
| – OMA   | 0.2        | dBm   |
| – OMA-TDP (min)                                     | -6.2       | dBm   |
| Transmitter and dispersion penalty (max)            | 3.2        | dB    |
| Average launch power of OFF transmitter (max)       | -30        | dBm   |
| Extinction ratio (min)                              | 3.5        | dB    |
| RIN <sub>12</sub> OMA (max)                         | -128       | dB/Hz |
| Optical Return Loss Tolerance (min)                 | 12         | dB    |
| <b>Receiver</b>                                     |            |       |
| Center wavelength (range)                           | 1260-1355  | nm    |
| Receive overload (max) in average power(note 1)     | 0.5        | dBm   |
| Receive sensitivity (min) in average power(note 1)  | -14.4      | dBm   |
| Receiver sensitivity (max) in OMA (note 2)          | -12.6      | dBm   |
| Receiver Reflectance (max)                          | -12        | dB    |
| Stressed receiver sensitivity (max) in OMA(note 2)  | -10.3      | dBm   |
| Vertical eye closure penalty (min)(note 3)          | 2.2        | dB    |
| Los Assert(min)                                     | -30        | dBm   |
| Los Dessert(max)                                    | -12        | dBm   |
| Los Hysteresis(min)                                 | 0.5        | dB    |
| Stressed eye jitter (min)(note 2)                   | 0.3        | Ulp-p |
| Receive electrical 3dB upper cutoff frequency (max) | 12.3       | GHz   |
| Receiver power (damage, Max)                        | 1.5        | dBm   |



**Notes:**

1. Average optical power shall be measured using the methods specified in TIA/EIA-455-95.
2. Receiver sensitivity is informative. Stressed receiver sensitivity shall be measured with conformance test signal for BER =  $1 \times 10^{-12}$ .
3. Vertical eye closure penalty and stressed eye jitter are the test conditions for measuring stressed receiver sensitivity. They are not the required characteristic of the receiver.
4. Power budget is defined as the different between the Rx sensitivity and the Tx output power of the interface.
5. Path penalty is intended as the power penalty of the interface between back-to-back and the maximum applied dispersion.

**8. DIGITAL DIAGNOSTIC FUNCTIONS**

The following digital diagnostic characteristics are defined over the Recommended Operating Environment unless otherwise specified. It is compliant to SFF8472 Rev10.2 with internal calibration mode. For external calibration please contact our sales team.

| Parameter                             | Symbol    | Min.  | Max  | Unit | Notes                 |
|---------------------------------------|-----------|-------|------|------|-----------------------|
| Temperature monitor absolute error    | DMI_Temp  | -3    | 3    | degC | Over operating temp   |
| Laser power monitor absolute error    | DMI_TX    | -3    | 3    | dB   |                       |
| RX power monitor absolute error       | DMI_RX    | -3    | 3    | dB   | -1dBm to -15dBm range |
| Supply voltage monitor absolute error | DMI_VCC   | -0.08 | 0.08 | V    | Full operating range  |
| Bias current monitor                  | DMI_Ibias | -10%  | 10%  | mA   |                       |

**Table 5: Digital diagnostic specification table**



## 9. ELECTRICAL CHARACTERISTICS


The following electrical characteristics are defined over the Recommended Operating Environment unless otherwise specified.

| Parameter                             | Symbol | Min. | Typical | Max  | Unit | Notes      |
|---------------------------------------|--------|------|---------|------|------|------------|
| Data Rate                             |        | -    | 10.3125 | -    | Gbps |            |
| Power Consumption                     |        | -    | 800     | 1000 | mW   |            |
| <b>Transmitter</b>                    |        |      |         |      |      |            |
| Single Ended Output Voltage Tolerance |        | -0.3 | -       | 4    | V    |            |
| C common mode voltage tolerance       |        | 15   | -       | -    | mV   |            |
| Tx Input Diff Voltage                 | VI     | 90   |         | 350  | mV   |            |
| Tx Fault                              | VoL    | -0.3 |         | 0.4  | V    | At 0.7mA   |
| Data Dependent Input Jitter           | DDJ    |      |         | 0.1  | UI   |            |
| Data Input Total Jitter               | TJ     |      |         | 0.28 | UI   |            |
| <b>Receiver</b>                       |        |      |         |      |      |            |
| Single Ended Output Voltage Tolerance |        | -0.3 | -       | 4    | V    |            |
| Rx Output Diff Voltage                | Vo     | 150  |         | 425  | mV   |            |
| Rx Output Rise and Fall Time          | Tr/Tf  | 30   |         |      | ps   | 20% to 80% |
| Total Jitter                          | TJ     |      |         | 0.7  | UI   |            |
| Deterministic Jitter                  | DJ     |      |         | 0.42 | UI   |            |

**Table 6: Electrical Characteristics**



**SFP-10G-LR-NT**  
 Cisco SFP+ 10GBASE-LR Ethernet Module  
 1310nm, 10km, SMF, LC, RoHS6!



**10. MECHANICAL**

Complies with SFF-8432 rev. 5.0

